



AVANTE

PRODUCT
CATALOG
VOL. 3 (EU)

IMPERIO PRO IMP205

NEW

IMPERIO SERIES

The **Imperio Pro Series** builds on the success of Avante Audio's original Imperio Series. Designed for very fast deployment and versatility, the **Imperio Pro IMP205** is a light-weight compact, high output active line array system fully equipped with neodymium components: Dual 5-inch Low-Mid transducers and Six 1.75" IDVAT HF drivers (Inverted Dome Vertical Array Technology). Each array module of IMP205 is driven by 440W RMS (1700W Peak) Class-D Power Amplifier with PFC Switching power supply.

Imperio Pro IMP205 features include: 32-bit DSP with advanced FIR digital filter technology. Controls include selectable DSP and input sensitivity. Rigging offers seven Splay Angles: 0, 2, 4, 6, 8, 10, & 12-degrees. The Imperio Pro IMP205 cabinets can also be configured as a flown array with the sub on top or ground stacked on subs.

Imperio Pro accessories include: Imperio Flybar LG (IMP265), Imperio Flybar Small (IMP496), Imperio Pole (IMP194) and Link-pin 2 (IMP340), Imperio Pro T-Adapter (IMP224), Imperio QRC Road case (IMP670).





MAIN FEATURES:

- 440W RMS, 1700W Peak Class D Amplifier Module
- Switching Power Design
- LED Power / Signal / Clip Indicator
- 32-bit DSP with FIR digital filters
- Input: 1x XLR and Locking Power Connector
- Output: 1x XLR and Locking Power Connector
- Gain: Selectable Input Sensitivity
- Power Input: 100-240V ~ 50/60Hz

SPEAKER:

- 2x 5.0" Neodymium Low-Mid transducers.
- 6x 1.75" IDVAT HF Neodymium drivers (Inverted Dome Vertical Array Technology)
- Type: 2-Way Active Closed Design
- Frequency Response: 100Hz – 20KHz
- Max Output SPL: 128dB (single box measured on Axis @1m)
- Selectable Input Sensitivity: -3dB, 0dB, 3dB, 6dB
- Cabinet: ABS Plastic
- Grill: Powder coated Steel
- Splay Angles: 0, 4, 6, 8, 10 & 12-degrees
- Integrated Rigging: Yes
- Horizontal Dispersion Angle: 100°
- Dimensions (HxWxD): 324 x 184.8 x 224mm
- Weight: 5.6 kg



IMPERIO PRO IMP118

NEW

IMPERIO SERIES

The **Avante Audio Imperio Pro IMP118** is a professional active subwoofer engineered for large events and pairs nicely with the Avante Imperio Pro IMP205 mini line array. With its powerful 18-inch high-power ceramic voice coil and bass-reflex system, this subwoofer delivers an exceptional frequency response of 32 Hz-130 Hz (-10dB) and 38 Hz-130 Hz (-3dB) that ensures deep, powerful bass.

Equipped with a selectable crossover frequency of 60 Hz, 70 Hz, 80 Hz, 90 Hz, 100 Hz, and 120 Hz, and a slope of LR 24dB per octave, the Imperio Pro IMP118 is designed to provide unparalleled sound control. The active class-D 2000-watt RMS and 4000-watt peak power ensures that you never have to worry about distortion or unwanted noise, while the variable input gain lets you customize the sound to your liking.

Built with an 11-ply birch enclosure, this subwoofer is made to withstand the rigors of touring, making it the perfect choice for professional sound engineers and event organizers. The 20 captive nut fly points (M10) and pole mount (M20) make it easy to mount the subwoofer in a variety of settings, while the recessed handles, bottom nylon skids, and rear rubber feet make it easy to transport and stack.

Finished in a sleek black polyuria and featuring a black powder-coated steel grill, this subwoofer is sure to look great on stage, and the IP rated locking connector In/Thru ensures a reliable connection that won't come unplugged. With its impressive maximum SPL of 136 dB peak, the Avante Audio Imperio Pro IMP118 subwoofer is the perfect choice for anyone looking to create a big impact to take your events to the next level!






SPECIFICATIONS:

- System Type: Active 2000-watt DSP Controlled 18-inch Sub, Bass-Reflex, Touring Subwoofer
- Frequency Response: 32 Hz-130 Hz (-10dB) 38 Hz-130 (-3 dB)
- Component: 18-inch High-power. Voice Coil 4-Inch (100mm) Ceramic
- Coverage pattern: Omni
- Crossover Frequency: Selectable: 60 Hz, 70 Hz, 80 Hz, 90 Hz, 100 Hz, 120 Hz. Slope- LR 24dB per octave
- Power: Active class-D 2000-watts RMS. 4000-watts Peak
- Input Gain: Variable
- Maximum SPL: 136 dB Peak
- Enclosure: 11-Ply Birch
- Suspension/Mounting: 20 captive nut fly points (M10), Pole Mount (M20).
- Transport: 2 recessed handles, bottom nylon skids, rear rubber feet, interlocking stacking hardware
- Finish: Black Polyuria
- Grill: Black powder-coated steel
- Connectors: Signal In/Thru: XLR/ XLRM
- AC IN/OUT: IP rated locking connector In/Thru. 100~240VAC 50/60Hz
- Dimensions: 527mm H x 574mm W x 762mm D
- Net Weight: 45.8kg
- Approvals: CD FCC, CETLus (Control #3069848)
- Accessories: Imperio Pro IMC118 interlocking caster board



IMPERIO PRO IMC118:

Interlocking Caster Board
(sold separately)

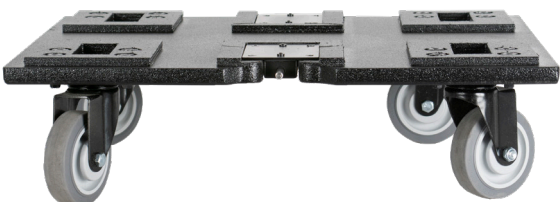

Built-in locking pin holds the Imperio Pro IMC118 caster board to the Imperio Pro IMP118 subwoofer



A15

ACHROMIC SERIES


The **Avante Audio A15** part of the Achromic series, is a 15-inch, 2-way active loudspeaker designed for delivering exceptional audio quality for all your events. This powerful loudspeaker packs a punch with an impressive 1200W peak power, consisting of 350W Class D (LF) and 50W Class AB (HF) RMS, and a frequency range of 45hz-20kHz.

Built-in with digital signal processing (DSP), the A15 features an easy-to-use LCD screen and multiple presets to customize your audio output. With the selectable time-out function, you can save energy and extend the lifespan of your speakers by setting an auto shut-off timer.

The A15 is built for durability and portability, with a H-PP molded enclosure and a 1.2mm steel grill. It also comes with two fly points on top and one on the back, a dual-position pole mount, and a top handle for easy transport.

With a peak SPL of 124dB and a nominal coverage of 90° x 60°, the A15 is perfect for small to midsize events. Its balanced female XLR ¼-inch combo jack and 2x RCA (phono) inputs provide you with the flexibility to connect to a variety of audio sources.

The A15 is made of durable high-tech plastic and weighs in at only 19.1 kgs. This versatile loudspeaker delivers exceptional audio quality, making it perfect for mobile entertainers and event producers or installations into bars, restaurants, lounges and small nightclubs.

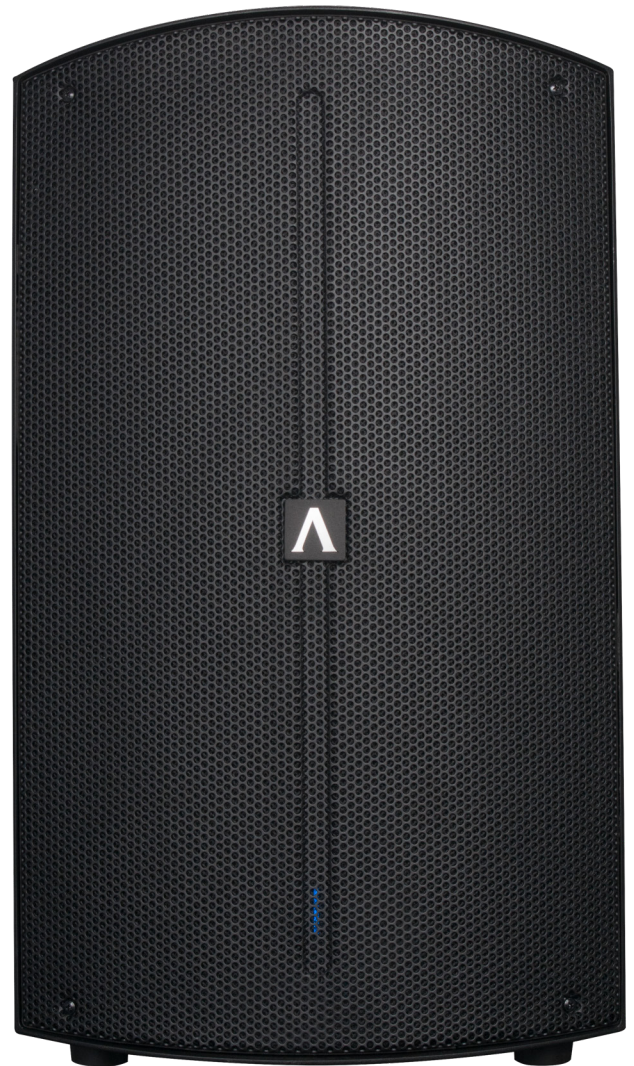

Adjustable logo badge for pole mount or monitor position




A15 COVER
Speaker Cover
(Sold Separately)

SPECIFICATIONS:

- Amp Power: 1200W Peak; 350W Class D (LF)
+ 50W Class AB (HF) RMS
- Built-in Digital Signal Processing (DSP) with LCD screen, EQ & multiple presets
- Frequency Range: 45hz-20kHz
- Nominal Coverage: 90° x 60°
- Output (Peak SPL @ 1M): 124dB
- Drivers: 15-inch woofer with 2.5-inch voice coil + 1.35-inch HF Compression Driver
- Inputs: Balanced Female XLR ¼-inch combo jack, 2x RCA (phono)
- Output: Balanced Male XLR
- Enclosures: H-PP Molded
- Grill: 1.2mm Steel
- Handles: 1 on top / 1 on side
- Fly Points: 2 on top / 1 on back
- Pole Mounting: Dual position 0-degrees or 7.5-degrees
- Power Input: 120V/60Hz or 240V/50Hz (country specific)
- Power Consumption: 400W
- Dimensions: 728 x 425 x 414mm
- Weight: 19.1 kg
- Approvals: CE, FCC, cETLus (Control #3069848)



DSP Screens:

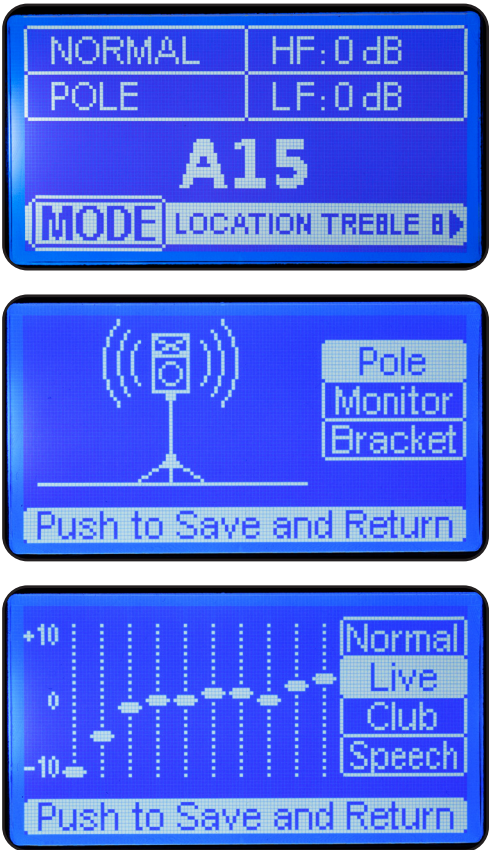

A15 - DSP INFORMATION

1. MODE:	A. Normal	B. Live	C. Club	D. Speech
2. LOCATION:	A. Pole	B. Monitor	C. Bracket	
3. TREBLE:	-10dB ~ +10dB			
4. BASS:	-10dB ~ +10dB			
5. LED:	A. Off	B. On	C. Limit	
6. RESET:	A. Yes	B. No		
7. INFO				

A12

ACHROMIC SERIES


The **Avante Audio A12** part of the Achromic series, is a 12-inch, 2-way active loudspeaker designed for delivering exceptional audio quality for all your events. This powerful loudspeaker packs a punch with an impressive 1200W peak power, consisting of 350W Class D (LF) and 50W Class AB (HF) RMS, and a frequency range of 60hz-20kHz.

Built-in with digital signal processing (DSP), the A12 features an easy-to-use LCD screen and multiple presets to customize your audio output. With the selectable time-out function, you can save energy and extend the lifespan of your speakers by setting an auto shut-off timer.

The A12 is built for durability and portability, with a H-PP molded enclosure and a 1.2mm steel grill. It also comes with two fly points on top and one on the back, a dual-position pole mount, and a top handle for easy transport.

With a peak SPL of 123dB and a nominal coverage of 90° x 60°, the A12 is perfect for small to midsize events. Its balanced female XLR ¼-inch combo jack and 2x RCA (phono) inputs provide you with the flexibility to connect to a variety of audio sources.

The A12 is made of durable high-tech plastic and weighs in at only 15.9 kgs. This light weight, versatile loudspeaker delivers exceptional audio quality, making it perfect for mobile entertainers and event producers or installations into bars, restaurants, lounges and small nightclubs.

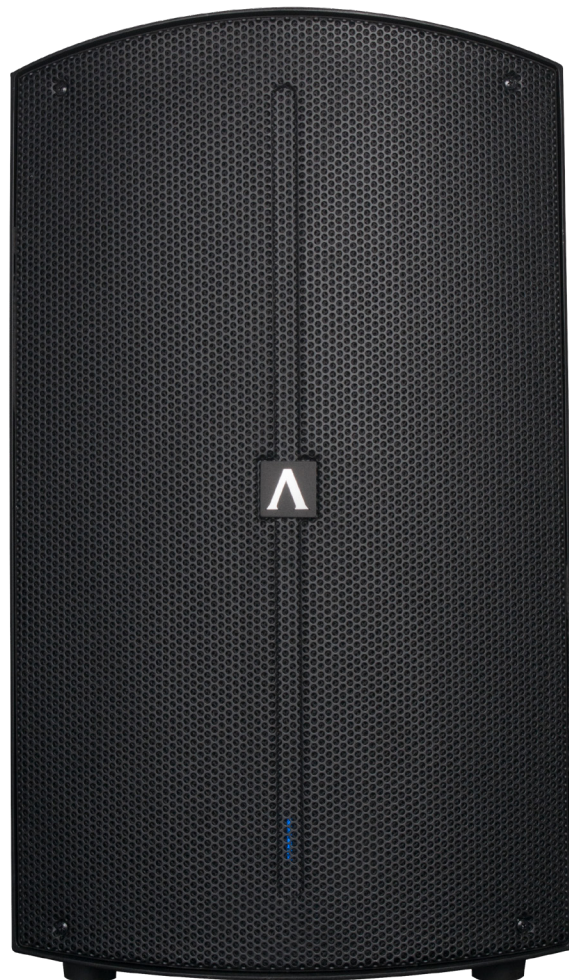

Adjustable logo badge for pole mount or monitor position




A12 COVER
Speaker Cover
(Sold Separately)

SPECIFICATIONS:

- Amp Power: 1200W Peak; 350W Class D (LF)
+ 50W Class AB (HF) RMS
- Built-in Digital Signal Processing (DSP) with LCD screen, EQ & multiple presets
- Frequency Range: 60hz-20kHz
- Nominal Coverage: 90° x 60°
- Output (Peak SPL @ 1M): 123dB
- Drivers: 12-inch woofer with 2.5-inch voice coil
+ 1.35-inch HF Compression Driver
- Inputs: Balanced Female XLR ¼-inch combo jack,
2x RCA (phono)
- Output: Balanced Male XLR
- Enclosures: H-PP Molded
- Grill: 1.2mm Steel
- Handles: 1 on top / 1 on side
- Fly Points: 2 on top / 1 on back
- Pole Mounting: Dual position 0-degrees or 7.5-degrees
- Power Input: 120V/60Hz or 240V/50Hz (country specific)
- Power Consumption: 400W
- Dimensions: 628 x 365 x 354mm
- Weight: 15.9 kg
- Approvals: CE, FCC, cETLus (Control #3069848)



DSP Screens:

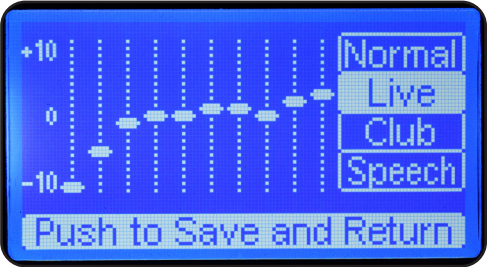

A12 - DSP INFORMATION

1. MODE:	A. Normal	B. Live	C. Club	D. Speech
2. LOCATION:	A. Pole	B. Monitor	C. Bracket	
3. TREBLE:	-10dB ~ +10dB			
4. BASS:	-10dB ~ +10dB			
5. LED:	A. Off	B. On	C. Limit	
6. RESET:	A. Yes	B. No		
7. INFO				

A10

ACHROMIC SERIES


The **Avante Audio A10** part of the Achromic series, is a 10-inch, 2-way active loudspeaker designed for delivering exceptional audio quality for all your events. This powerful loudspeaker packs a punch with an impressive 1000W peak power, consisting of 250W Class D (LF) and 50W Class AB (HF) RMS, and a frequency range of 70Hz-20kHz.

Built-in with digital signal processing (DSP), the A10 features an easy-to-use LCD screen and multiple presets to customize your audio output. With the selectable time-out function, you can save energy and extend the lifespan of your speakers by setting an auto shut-off timer.

The A10 is built for durability and portability, with a H-PP molded enclosure and a 1.2mm steel grill. It also comes with two fly points on top and one on the back, a dual-position pole mount, and a top handle for easy transport.

With a peak SPL of 121dB and a nominal coverage of 90° x 60°, the A10 is perfect for small to midsize events. Its balanced female XLR ¼-inch combo jack and 2x RCA (phono) inputs provide you with the flexibility to connect to a variety of audio sources.

The A10 is made of durable high-tech plastic and weighs in at only 11.3 kgs. This light weight, versatile loudspeaker delivers exceptional audio quality, making it perfect for mobile entertainers and event producers or installations into bars, restaurants, lounges and small nightclubs.

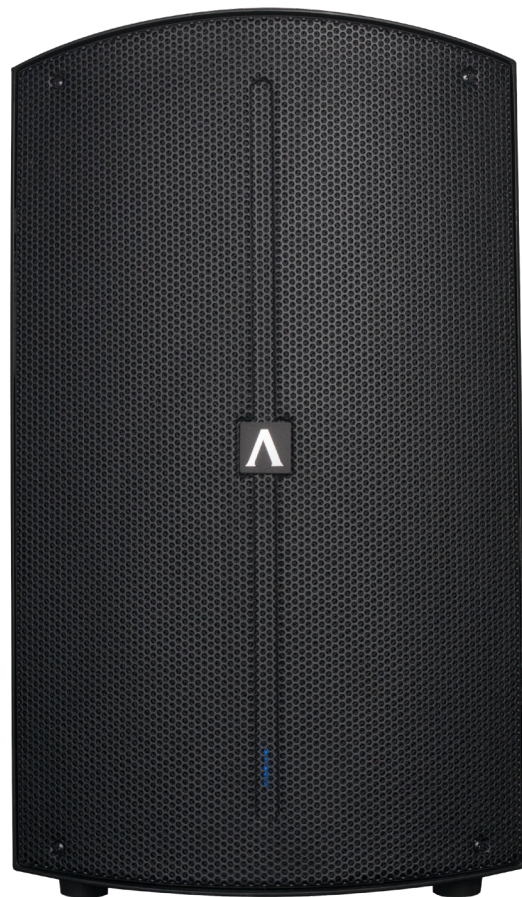

Adjustable logo badge for pole mount or monitor position

A10 COVER
Speaker Cover
(Sold Separately)



A10-TOTE
Tote Bag for A10X & A10
(Sold Separately)




SPECIFICATIONS:

- Amp Power: 1000W Peak; 250W Class D (LF)
+ 50W Class AB (HF) RMS
- Built-in Digital Signal Processing (DSP) with LCD screen, EQ & multiple presets
- Frequency Range: 70hz-20kHz
- Output (Peak SPL @ 1m): 121dB
- Nominal Coverage: 90° x 60°
- Drivers: 10-inch woofer with 2-inch voice coil + 1-inch HF Compression Driver
- Inputs: Balanced Female XLR ¼-inch combo jack, 2x RCA (phono)
- Output: Balanced Male XLR
- Enclosures: H-PP Molded
- Grill: 1.2mm Steel
- Handles: 1 on top
- Fly Points: 2 on top / 1 on back
- Pole Mounting: Dual position 0-degrees or 7.5-degrees
- Power Input: 120V/60Hz or 240V/50Hz (country specific)
- Power Consumption: 400W
- Dimensions: 530 x 310 x 299mm
- Weight: 11.3 kg
- Approvals: CE, FCC, cETLus (Control #3069848)



DSP Screens:

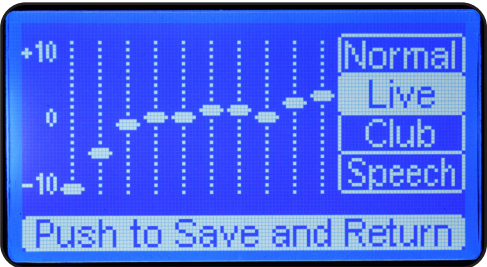

A10 - DSP INFORMATION

1. MODE:	A. Normal	B. Live	C. Club	D. Speech
2. LOCATION:	A. Pole	B. Monitor	C. Bracket	
3. TREBLE:	-10dB ~ +10dB			
4. BASS:	-10dB ~ +10dB			
5. LED:	A. Off	B. On	C. Limit	
6. RESET:	A. Yes	B. No		
7. INFO				

A18S

ACHROMIC SERIES

Bring music to life with the **Avante Audio A18S** subwoofer, part of the Achromic Series. With its 18-inch woofer and 3-inch voice coil, this active subwoofer delivers deep, powerful bass that fills large size rooms. The built-in Digital Signal Processing (DSP) with LCD screen, EQ, and multiple presets makes it easy to customize your sound to fit any environment. The 1600W peak and 500W RMS Class D amplifier provide ample power for even the most demanding music. Plus, the 15mm plywood enclosure and 1.5mm steel grill ensure durability and longevity. With the option for omni-directional or cardioid coverage and ground stack pole mounting, the A18S is a versatile addition to any sound system.




A18S COVER
Speaker Cover
(Sold Separately)



A18SC COVER
Speaker Cover when
casters are attached
(Sold Separately)




AVAC4
Set of 4 casters for
the A18S
(Sold Separately)


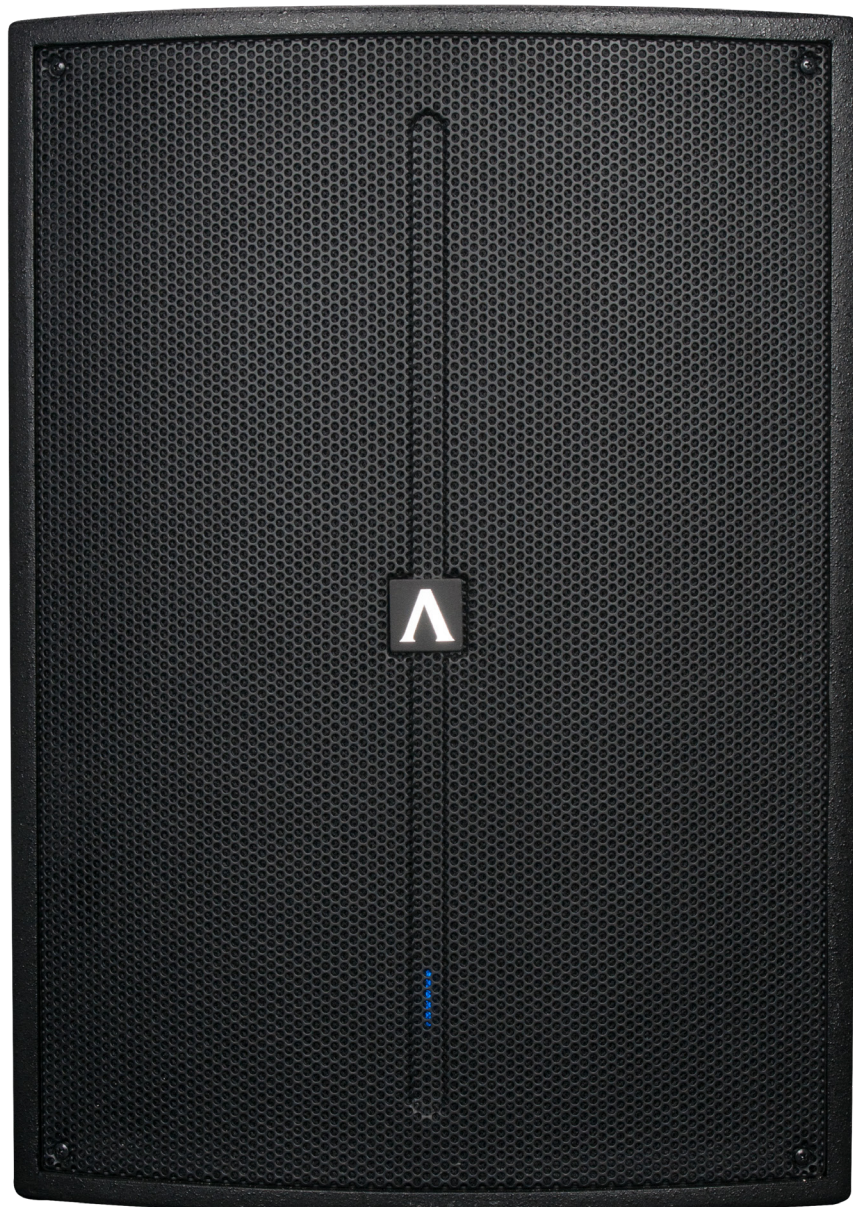


SPECIFICATIONS:

- Amp Power: 1600W Peak; 500W RMS Class D amplifier
- Built-in Digital Signal Processing (DSP) with LCD screen, EQ & multiple presets
- Frequency Range: 35hz-150kHz
- Nominal Coverage: Omni-direction, cardioid
- Output (Peak SPL @ 1M): 127dB
- Drivers: 18-inch woofer with 3-inch voice coil
- Inputs: 2x Balanced Female XLR ¼-inch combo jack
- Outputs: 2x Balanced Male XLR
- Enclosures: 15mm Plywood
- Grill: 1.5mm Steel
- Handles: Two: 1 on each side
- Pole Mounting: Ground Stack (includes mounting pole)
- Power Input: 115V/60Hz or 240V/50Hz (country specific)
- Power Consumption: 600W
- Dimensions: 662 x 510 x 647mm
- Weight: 33.1 kg

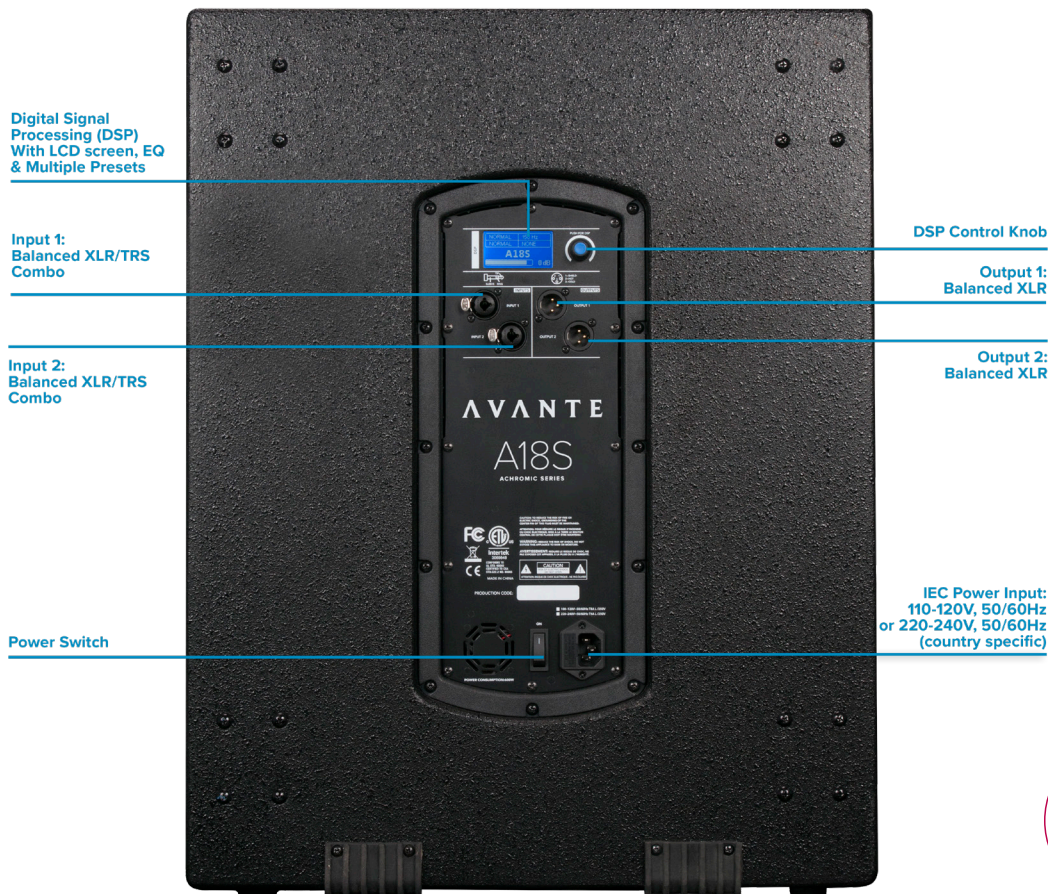

DSP Screens:

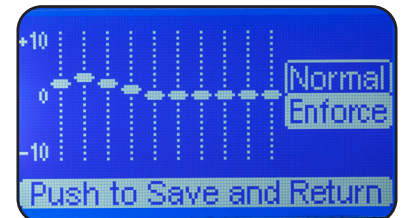



AS8 ACDC

NEW

ACHROMIC SERIES

The **AS8 ACDC** active column system from Avante Audio, the perfect portable sound system for small venues, acoustic performers, and mobile entertainers. With its fully-featured and easy to set up design, this system comprises an 8-inch neodymium subwoofer enclosure and two column units, one loaded with six precision-aligned 2.75-inch neodymium drivers and the other serving as a spacer to lift the speaker column to optimal height.

Thanks to Avante's innovative **SAM (Secure Array Mount)** system, the columns can be locked securely to the sub and to each other, without any risk of toppling over. SAM connection also eliminates the need for speaker cables by passing the audio signal from the sub up to the columns.

The AS8 ACDC boasts a Class D power amplifier with a built-in limiter that delivers 1000W of power, making it perfect for small bands and solo performers. The flexible 4-input mixer with a 2-band EQ allows direct connection of line-level audio sources, microphones, and even guitars, while the **BLUETOOTH 5.0®+** stereo audio connection enables wireless streaming of music from your smartphone, tablet, or laptop.

This lightweight system can be easily transported in a small car and comes with a padded bag for carrying and protecting the column units. It operates self-contained on a rechargeable Lithium-Ion battery, providing an average run time of 4 to 5 hours at full charge. Alternatively, it can be plugged in using the universal power supply (100 to 240 VAC 50/60Hz).

The active vented subwoofer boasts a frequency response of 55-200Hz, with a maximum output SPL of 116dB (at max. amp output). The 8-inch neodymium subwoofer, with a 1.5" voice coil and 28 oz. magnet, is housed in a durable PP plastic cabinet with a 1.0mm steel grill. Meanwhile, the passive full-range speaker column has a frequency response of 180-20kHz, a maximum output SPL of 110dB, and is fitted with 6x 2.75-inch neodymium drivers. The cabinet is also made of durable PP plastic with a 1.0mm steel grill.


The AS8 ACDC also features a 4-input mixer with line out, two mic/line inputs, two guitar/line inputs, and a 1/8" stereo Aux Input. Dual band EQ and a line output (XLR) round out the package. And with the extended position dimensions of 350 x 430 x 2010mm and compact position dimensions of 350 x 430 x 1210mm, the AS8 ACDC is versatile enough to handle any small venue gig.

SYSTEM INCLUDES:

- 8-inch Subwoofer
- Column with six 2.75-inch Speakers
- Spacer
- Carry Bag for Columns

AVANTE SAM:

Secure Array Mount

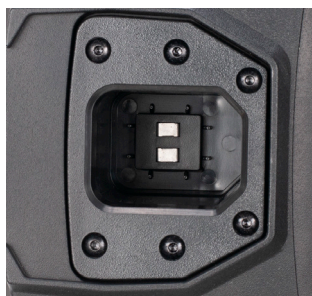

AMPLIFIER:

- Inputs: Two XLR/TRS combo jacks, Stereo 1/4" inputs, Stereo 1/8" input, Bluetooth®
- Outputs: XLR balanced line output
- Power output: RMS 250W (SUB) RMS, 1000W peak
- Volume: Input Gain control per channel
- EQ: Main out 2 band EQ
- LEDs: Power/Clip indicator
- Power Input: 100-240V~50/60Hz switchable 250W On-board Lithium-Ion Battery (Rechargeable)
- Battery life: 4-5 hours (when fully charged)
- Amplifier: Class D amplifier with switching power design

ACTIVE VENTED SUBWOOFER:

- Frequency Response: 55-200Hz
- Max Output SPL: 116dB (at max. amp output)
- Impedance: 4 Ohm
- Driver: 8-inch neodymium subwoofer, 1.5" voice coil, 28 oz. magnet
- Cabinet: PP plastic
- Grill: 1.0mm steel
- Dimensions: 350 x 430 x 413mm
- Weight: 11 kg

PASSIVE FULL-RANGE SPEAKER COLUMN:

- Frequency Response: 180-20kHz
- Max. output SPL: 110dB
- Impedance: 4 Ohm
- Driver: 6x 2.75-inch neodymium drivers
- Cabinet: PP plastic
- Grill: 1.0mm steel
- Dimensions: 96 x 96 x 870mm (each column)
- Weight: 6.45 kg

BATTERY:

- Nominal Value: 28.8V, 5000 mAh (8 x 2 cell) lithium battery pack
- Capacity: 144 Wh
- Size: 186mm x 143mm x 21.5mm
- Weight: 980 g
- Max Charging Voltage: 33.6 V
- Charging Current: 1.5 A
- Charging Power: 45 W



Battery Life Indicator

REAR PANEL:

- 4 input mixer with line out
- Two (2) Mic/Line Input (XLR/TRS Combo)
- Two (2) Guitar/Line Input (1/4" Stereo)
- 1/8" stereo Aux Input
- Line Output (XLR)
- Dual Band EQ
- Battery life indicator
- BLUETOOTH® 5.0+ Stereo Connection

EXTENDED POSITION:

- Dimensions: 350 x 430 x 2010mm

COLLAPSED POSITION:

- Dimensions: 350 x 430 x 1210mm.

APPROVALS:

- cETLus (Control #3069848)
- FCC




COLUMN BAG
Fits the two speaker columns
(Included with system)



AS8 COVER

Slip cover for the AS8 & AS8 ACDC
8-inch active subwoofer.
(Sold Separately)

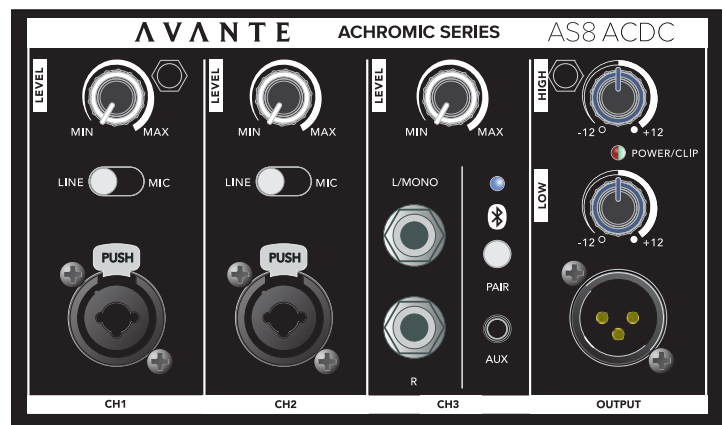

AS8

ACHROMIC SERIES

The fully-featured and easy to setup **ACHROMIC AS8** system comprises an active 8-inch subwoofer enclosure alongside two column units. One is loaded with six precision-aligned 2.75" speaker cones while the other serves as a spacer to lift the speaker column up to optimal height. Both feature Avante's new SAM (Secure Array Mount) system which allows the columns to lock securely to the sub and to one another without risk of being toppled over. The SAM connection also passes the audio signal from the sub up to the columns, removing the need for speaker cables, and allows the main column to connect directly to the sub without using the spacer if required, ideal for performances from a high stage.

Featuring a Class D power amplifier with built-in limiter that delivers 800W of power, the sub unit also integrates a flexible three-channel mixer with 2-band EQ. This allows direct connection of line-level audio sources as well as microphones and even a guitar, making the system ideal for acoustic solo performers, duos and even small bands. The unit is also equipped with a Bluetooth audio connection that allows wireless streaming of music from a smartphone, tablet or laptop.

The lightweight system can be easily transported in a small car and is supplied with a padded bag for carrying and protecting the column units. This makes it the perfect system for



Overall, the AS8 ACDC active column system is the ideal solution for small venues, performers and mobile entertainers looking for a portable sound system that delivers premium sound quality and ease of use.

SYSTEM INCLUDES:

- 8-inch Subwoofer
- Column with six 2.75-inch S
- Spacer
- Carry Bag for Columns

AVANTE SAM:

Secure Array Mount

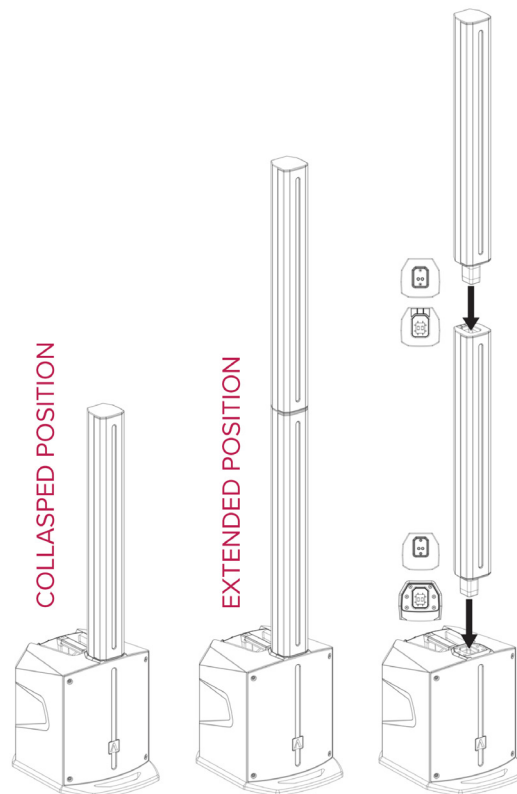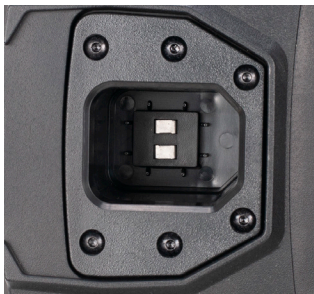

AMPLIFIER:

- Inputs: 2xXLR/TRS combo jacks, Stereo RCA & Stereo 1/8" inputs, Bluetooth
- Outputs: XLR balanced line output
- Power output: RMS 120W(SUB) RMS, 400W peak, +120W(SAT) RMS, 400W peak
- Volume: Input Gain control per channel
- EQ: Main out 2 band shelving EQ
- LEDs: Power/Clip indicator
- Power Input: 100-240V~50/60Hz switchable 250W
- Amplifier: Class D amplifier with switching power design

ACTIVE VENTED SUBWOOFER:

- Frequency Response: 55-200Hz
- Max Output SPL: 116dB (at max. amp output)
- Impedance: 4 Ohm
- Driver: 8-inch subwoofer, 1.5" voice coil, 28Oz
- Cabinet: PP plastic
- Grill: 1.0mm steel
- Dimensions: 350 x 430 x 413mm
- Weight: 13 kg

PASSIVE FULL-RANGE SPEAKER COLUMN:

- Frequency Response: 180-20kHz
- Max. output SPL: 120dB
- Impedance: 4 Ohm
- Driver: 6x 2.75-inch full range line array
- Cabinet: PP plastic
- Grill: 1.0mm steel
- Dimensions: 96 x 96 x 870mm (each column)
- Weight: 5 kg (each column)

REAR PANEL:

- 3-channel mixer with line out
- Mic/Line Input
- Guitar/Line Input
- Aux input
- Line Output
- Dual Band EQ
- Bluetooth Connection

EXTENDED POSITION:

- Dimensions: 350 x 430 x 2010mm
- Weight: 23 kg

COLLAPSED POSITION:

- Dimensions: 350 x 430 x 1210mm
- Weight: 18 kg

APPROVALS:

- cETLus (Control #3069848)
- FCC



COLUMN BAG

Fits the two speaker columns
(Included with system)



AS8 COVER

Slip cover for the AS8 & AS8 ACDC
8-inch active subwoofer.
(Sold Separately)






SWB40 - Wall Mount (40kg)

Optional adjustable (universal) Wall Mount for A10, A12 & A15.



LINKPIN 4

Set of 4 linkpins for the Imperio or Imperio Pro Series.

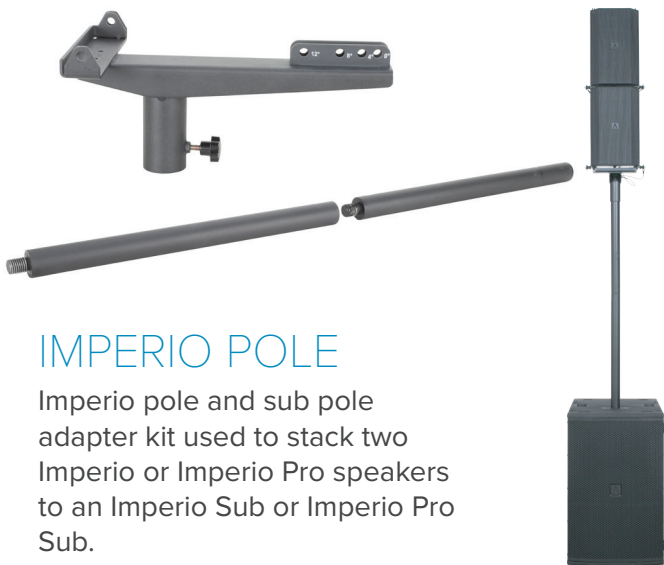

IMPERIO POLE

Imperio pole and sub pole adapter kit used to stack two Imperio or Imperio Pro speakers to an Imperio Sub or Imperio Pro Sub.



IMPERIO PRO T-ADAPTER

Adapts Imperio or Imperio Pro IMP205 speaker to Imperio pole or any tripod speaker stand.



ACCU-CABLE
EXTEND YOUR WORLD...

XL PRO - XLR CABLES

Tour-grade 8MM Jacket - Fully braided low loss 20g copper conductors

XLPRO-1: 1 ft. 3-pin male - female XLR
 XLPRO-3: 3 ft. 3-pin male - female XLR
 XLPRO-6: 6 ft. 3-pin male - female XLR
 XLPRO-10: 10 ft. 3-pin male - female XLR
 XLPRO-25: 25 ft. 3-pin male - female XLR
 XLPRO-35: 35 ft. 3-pin male - female XLR
 XLPRO-50: 50 ft. 3-pin male - female XLR
 XLPRO-100: 100 ft. 3-pin male - female XLR

ACCU-STAND
PROFESSIONAL SUPPORT SYSTEMS

SPSX2B

Two universal heavy duty speaker stands in a carry bag. 100 lbs. max. Max height: 6 ft.



AVANTE



www.avanteaudio.com



@avanteaudio